

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : C23C 28/00	A1	(11) International Publication Number: WO 94/08069 (43) International Publication Date: 14 April 1994 (14.04.94)
(21) International Application Number: PCT/US93/09038 (22) International Filing Date: 23 September 1993 (23.09.93) (30) Priority data: 954,450 30 September 1992 (30.09.92) US (71) Applicant: UNITED TECHNOLOGIES CORPORATION [US/US]; United Technologies Building, Hartford, CT 06101 (US). (72) Inventors: SCHARMAN, Alan, J. ; 16 Alice Road, Hebron, CT 06231 (US). MATARESE, Alfred, P. ; 36 Stonehedge Drive, North Haven, CT 06473 (US). EATON, Harry, E., Jr. ; 391 Perrin Road, Woodstock, CT 06281 (US).		(74) Agent: ROMANIK, George, J.; United Technologies Research Center, Legal Department, Mail Stop 129-6, 411 Silver Lane, East Hartford, CT 06108 (US). (81) Designated States: JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(54) Title: CERAMIC COMPOSITE COATING MATERIAL (57) Abstract A ceramic coating for a metal article includes a metallic bond coat deposited on the metal article, at least one MCrAlY/ceramic layer deposited on the bond coat, and a ceramic composite top layer deposited on the MCrAlY/ceramic layer. The M in MCrAlY stands for Fe, Ni, Co, or a mixture of Ni and Co. The ceramic in the MCrAlY/ceramic layer comprises mullite, alumina, zircon, silimanite, sodium zirconium phosphate, fused silica, cordierite, aluminum titanate, or zirconia. The ceramic composite top layer comprises a ceramic matrix and at least one secondary phase. A method of making the coating includes sequentially depositing a metallic bond coat on the metal article, at least one MCrAlY/ceramic layer on the bond coat, and a ceramic composite top layer on the MCrAlY/ceramic layer.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NE	Niger
BE	Belgium	GN	Guinea	NL	Netherlands
BF	Burkina Faso	GR	Greece	NO	Norway
BG	Bulgaria	HU	Hungary	NZ	New Zealand
BJ	Benin	IE	Ireland	PL	Poland
BR	Brazil	IT	Italy	PT	Portugal
BY	Belarus	JP	Japan	RO	Romania
CA	Canada	KP	Democratic People's Republic of Korea	RU	Russian Federation
CF	Central African Republic	KR	Republic of Korea	SD	Sudan
CG	Congo	KZ	Kazakhstan	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovak Republic
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	MC	Monaco	TC	Togo
CZ	Czech Republic	MG	Madagascar	UA	Ukraine
DE	Germany	ML	Mali	US	United States of America
DK	Denmark	MN	Mongolia	UZ	Uzbekistan
ES	Spain			VN	Viet Nam
FI	Finland				

- 1 -

Description

Ceramic Composite Coating Material

Technical Field

The present invention is directed to a ceramic composite coating material.

5 Background Art

To improve performance and efficiency, future internal combustion engines will operate at higher temperatures and pressures than present-day engines. For example, commercial diesel engines may operate at cylinder temperatures of about 760°C (1400°F) to about 870°C (1600°F) and brake mean effective pressures up to about 1030 kPa (150 psi).
10 Military diesel engines may operate at cylinder temperatures up to about 925°C (1700°F) and brake mean effective pressures greater than about 1380 kPa (200 psi). Such conditions, combined with rapid thermal cycling induced by the cylinder firing cycle, create a severe environment for in-cylinder engine parts. To operate under such conditions, critical engine parts must be insulated. Insulation lowers the temperature of the parts and reduces the
15 amount of heat rejected to the environment. To be cost effective, the insulation should have a service life greater than about 20,000 hours.

U.S. Patent 4,738,227 to Kamo et al. describes a two-layer thermal barrier coating for insulating parts in internal combustion engines. The coating includes a base layer of zirconia (ZrO_2) plasma sprayed over a metal engine part. The ZrO_2 layer is covered with a
20 layer of a wear resistant ceramic to improve its service life. Suitable wear resistant ceramics include one containing silica (SiO_2), chromia (Cr_2O_3), and alumina (Al_2O_3) and another based on zircon (ZrSiO_4).

U.S. Patent 4,711,208 to Sander et al. discloses coating piston heads with several layers of flame or plasma sprayed material. The layers can include ZrO_2 , ZrSiO_4 , metal, and
25 cermet. Sander et al. also teach that an aluminum titanate piston crown insert covered with a fully stabilized ZrO_2 coating can replace the multilayered insulation.

Similar, multilayered, ceramic thermal barrier coatings are used in the aerospace industry to insulate turbine blades in gas turbine engines. Gas turbine engine parts, however, are not subjected to rapid thermal cycling as are internal combustion engine parts.
30 Commonly assigned U.S. Patents 4,481,237 to Bosshart et al. and 4,588,607 to Matarese et

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : C23C 28/00	A1	(11) International Publication Number: WO 94/08069 (43) International Publication Date: 14 April 1994 (14.04.94)
(21) International Application Number: PCT/US93/09038 (22) International Filing Date: 23 September 1993 (23.09.93) (30) Priority data: 954,450 30 September 1992 (30.09.92) US (71) Applicant: UNITED TECHNOLOGIES CORPORATION [US/US]; United Technologies Building, Hartford, CT 06101 (US). (72) Inventors: SCHARMAN, Alan, J. ; 16 Alice Road, Hebron, CT 06231 (US). MATARESE, Alfred, P. ; 36 Stonehedge Drive, North Haven, CT 06473 (US). EATON, Harry, E., Jr. ; 391 Perrin Road, Woodstock, CT 06281 (US).		(74) Agent: ROMANIK, George, J.; United Technologies Research Center, Legal Department, Mail Stop 129-6, 411 Silver Lane, East Hartford, CT 06108 (US). (81) Designated States: JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(54) Title: CERAMIC COMPOSITE COATING MATERIAL (57) Abstract A ceramic coating for a metal article includes a metallic bond coat deposited on the metal article, at least one MCrAlY/ceramic layer deposited on the bond coat, and a ceramic composite top layer deposited on the MCrAlY/ceramic layer. The M in MCrAlY stands for Fe, Ni, Co, or a mixture of Ni and Co. The ceramic in the MCrAlY/ceramic layer comprises mullite, alumina, zircon, silimanite, sodium zirconium phosphate, fused silica, cordierite, aluminum titanate, or zirconia. The ceramic composite top layer comprises a ceramic matrix and at least one secondary phase. A method of making the coating includes sequentially depositing a metallic bond coat on the metal article, at least one MCrAlY/ceramic layer on the bond coat, and a ceramic composite top layer on the MCrAlY/ceramic layer.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NE	Niger
BE	Belgium	GN	Guinea	NL	Netherlands
BF	Burkina Faso	GR	Greece	NO	Norway
BG	Bulgaria	HU	Hungary	NZ	New Zealand
BJ	Benin	IE	Ireland	PL	Poland
BR	Brazil	IT	Italy	PT	Portugal
BY	Belarus	JP	Japan	RO	Romania
CA	Canada	KP	Democratic People's Republic of Korea	RU	Russian Federation
CF	Central African Republic	KR	Republic of Korea	SD	Sudan
CG	Congo	KZ	Kazakhstan	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovak Republic
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	MC	Monaco	TC	Togo
CZ	Czech Republic	MG	Madagascar	UA	Ukraine
DE	Germany	ML	Mali	US	United States of America
DK	Denmark	MN	Mongolia	UZ	Uzbekistan
ES	Spain			VN	Viet Nam
FI	Finland				

- 1 -

Description

Ceramic Composite Coating Material

Technical Field

The present invention is directed to a ceramic composite coating material.

5 Background Art

To improve performance and efficiency, future internal combustion engines will operate at higher temperatures and pressures than present-day engines. For example, commercial diesel engines may operate at cylinder temperatures of about 760°C (1400°F) to about 870°C (1600°F) and brake mean effective pressures up to about 1030 kPa (150 psi).

- 10 Military diesel engines may operate at cylinder temperatures up to about 925°C (1700°F) and brake mean effective pressures greater than about 1380 kPa (200 psi). Such conditions, combined with rapid thermal cycling induced by the cylinder firing cycle, create a severe environment for in-cylinder engine parts. To operate under such conditions, critical engine parts must be insulated. Insulation lowers the temperature of the parts and reduces the amount of heat rejected to the environment. To be cost effective, the insulation should have a service life greater than about 20,000 hours.

- U.S. Patent 4,738,227 to Kamo et al. describes a two-layer thermal barrier coating for insulating parts in internal combustion engines. The coating includes a base layer of zirconia (ZrO_2) plasma sprayed over a metal engine part. The ZrO_2 layer is covered with a layer of a wear resistant ceramic to improve its service life. Suitable wear resistant ceramics include one containing silica (SiO_2), chromia (Cr_2O_3), and alumina (Al_2O_3) and another based on zircon (ZrSiO_4).

- U.S. Patent 4,711,208 to Sander et al. discloses coating piston heads with several layers of flame or plasma sprayed material. The layers can include ZrO_2 , ZrSiO_4 , metal, and cermet. Sander et al. also teach that an aluminum titanate piston crown insert covered with a fully stabilized ZrO_2 coating can replace the multilayered insulation.

- Similar, multilayered, ceramic thermal barrier coatings are used in the aerospace industry to insulate turbine blades in gas turbine engines. Gas turbine engine parts, however, are not subjected to rapid thermal cycling as are internal combustion engine parts. Commonly assigned U.S. Patents 4,481,237 to Bosshart et al. and 4,588,607 to Matarese et

- 2 -

al. teach coatings that include a metallic bond coat deposited on a metal substrate, a metal/ceramic layer deposited on the bond coat, and a ZrO_2 ceramic top layer deposited on the metal/ceramic layer.

Although ZrO_2 -based thermal barrier coatings allow internal combustion engines to
5 operate under severe conditions, to date, they have not achieved the desired service life. Therefore, what is needed in the art is a thermal barrier coating that allows internal combustion engines to operate under severe conditions while achieving an acceptable service life.

Disclosure of the Invention

10 The present invention is directed to a thermal barrier coating that allows internal combustion engines to operate under severe conditions while achieving an acceptable service life.

One aspect of the invention includes a metal article coated with a ceramic coating. The coating has a metallic bond coat deposited on the metal article, at least one
15 MCrAlY/ceramic layer deposited on the bond coat, and a ceramic composite top layer deposited on the MCrAlY/ceramic layer. The M in MCrAlY stands for Fe, Ni, Co, or a mixture of Ni and Co. The ceramic in the MCrAlY/ceramic layer comprises mullite, alumina, zircon, sillimanite, sodium zirconium phosphate, fused silica, cordierite, aluminum titanate, or zirconia. The ceramic composite top layer comprises a ceramic matrix and at
20 least one secondary phase.

Another aspect of the invention includes a method of making the coating described above by sequentially depositing a metallic bond coat on a metal article, at least one MCrAlY/ceramic layer on the bond coat, and a ceramic composite top layer on the MCrAlY/ceramic layer.

25 These and other features and advantages of the present invention will become more apparent from the following description and accompanying drawing.

Brief Description of the Drawing

Figure 1 is a partially broken-away perspective view of a cylinder in an internal combustion engine that in which a piston crown and a piston head firedeck are coated with
30 a coating of the present invention.

Figure 2 is a photomicrograph of a highly porous coating of the present invention.

- 3 -

Best Mode for Carrying Out the Invention

The thermal barrier coating of the present invention is a multilayer coating that includes a metallic bond coat, at least one metal/ceramic layer deposited on the bond coat, and a ceramic composite top layer deposited on the metal/ceramic layer. The coating and its individual layers can be any thickness required for a particular application. Preferably, the coating will be about 0.3 mm (12 mils) to about 5.0 mm (200 mils) thick.

The coatings of the present invention can be applied to any article that can benefit from the coatings' properties. For example, the coatings can be applied to components in a cylinder of an internal combustion engine that require protection from rapid thermal cycling. Fig. 1 shows a cylinder 2 of an internal combustion engine in which the top or crown of a piston 4 is coated with a coating 6 of the present invention. Similarly, a piston head firedeck, the closed portion of the cylinder 2 that faces the piston crown, can be coated with a coating 8 of the present invention. The coatings 6, 8 face the combustion chamber in the cylinder, defined by the walls of the cylinder, the piston crown, and piston head firedeck, and are exposed to rapid thermal cycling created by the cylinder firing cycle.

The bond coat can be any material known in the art that creates good bonds with a metal substrate and the metal/ceramic layer. One suitable material is a Ni-Cr-Al composition used in the aerospace industry. Such a material is commercially available as Metco® 443 from the Metco division of Perkin-Elmer Corporation (Westbury, NY). Preferably, the bond coat will be about 0.1 mm (4 mils) to about 0.15 mm (6 mils) thick.

The metal/ceramic layer can comprise a MCrAlY material, where M is Fe, Ni, Co, or a mixture of Ni and Co, and a ceramic material in any suitable proportion. The ceramic material can comprise mullite ($3\text{Al}_2\text{O}_3 \cdot 2\text{SiO}_2$), alumina (Al_2O_3), or any other suitable ceramic, such as zircon (ZrSiO_4), sillimanite ($\text{Al}_2\text{O}_3 \cdot \text{SiO}_2$), sodium zirconium phosphate (NaZrPO_4), fused silica (SiO_2), cordierite ($\text{Mg}_2\text{Al}_4\text{Si}_5\text{O}_{18}$), or aluminum titanate (AlTiO_4). MCrAlY materials are known in the aerospace industry and can be obtained from Union Carbide Specialty Powders (Indianapolis, IN) or Sulzer Plasma Alloy Metals (Troy, MI). The ceramic materials are well known and readily available. Preferably, the coating will have a first, constant composition metal/ceramic layer deposited on the bond coat and a second, graded composition metal/ceramic layer deposited on the first metal/ceramic layer. For example, the first, constant composition metal/ceramic layer can comprise about 20 wt% to about 60 wt% CoCrAlY (nominally Co-23Cr-13Al-0.65Y) and about 80 wt% to about 40 wt% mullite or Al_2O_3 , and can be about 0.1 mm (4 mils) to about 0.5 mm (20 mils) thick.

- 4 -

The composition of the second, graded metal/ceramic layer can vary continuously from the composition of the first metal/ceramic layer to a suitable composition having a higher proportion of mullite or Al_2O_3 . For example, the final composition can include about 15 wt% to about 20 wt% CoCrAlY and about 85 wt% to about 80 wt% mullite. The second
5 metal/ceramic layer can be about 0.1 mm (4 mils) to about 0.5 mm (20 mils) thick.

The ceramic composite top layer comprises a ceramic matrix and one or more secondary phases dispersed in the matrix. The matrix should have thermal properties suitable for the intended application. For example, if the coating will be used in local rapid thermal cycling applications, the matrix should be able to withstand conditions in which portions of
10 the coating's surface vary by more than about 110°C (200°F), and, preferably, more than about 278°C (500°F), from the mean surface temperature. In addition, the matrix's thermal properties should permit the coating to survive combustion or other cyclic events that occur at least about 1 cycle per second and, preferably, at least about 15 cycles per second. To withstand such conditions, the matrix should have a coefficient of thermal expansion (CTE)
15 less than about $5.4 \times 10^{-6}^\circ\text{C}^{-1}$ ($3.0 \times 10^{-6}^\circ\text{F}^{-1}$) and a thermal conductivity between about $1 \text{ J sec}^{-1}\text{m}^{-1}^\circ\text{C}^{-1}$ ($7 \text{ Btu hr}^{-1}\text{ft}^{-2}(\text{F/in})^{-1}$) and about $1.7 \text{ J sec}^{-1}\text{m}^{-1}^\circ\text{C}^{-1}$ ($12 \text{ Btu hr}^{-1}\text{ft}^{-2}(\text{F/in})^{-1}$). Preferably, the matrix's CTE will be less than about $4.9 \times 10^{-6}^\circ\text{C}^{-1}$ ($2.7 \times 10^{-6}^\circ\text{F}^{-1}$) and the thermal conductivity will be between about $1.1 \text{ J sec}^{-1}\text{m}^{-1}^\circ\text{C}^{-1}$ ($7.5 \text{ Btu hr}^{-1}\text{ft}^{-2}(\text{F/in})^{-1}$) and about $1.4 \text{ J sec}^{-1}\text{m}^{-1}^\circ\text{C}^{-1}$ ($10 \text{ Btu hr}^{-1}\text{ft}^{-2}(\text{F/in})^{-1}$). Matrices with these thermal properties have
20 good thermal shock resistance and are less sensitive to thermal stresses from in-plane thermal gradients than are materials with higher CTEs. Matrix materials suitable for rapid cycling applications include mullite ($3\text{Al}_2\text{O}_3 \cdot 2\text{SiO}_2$), zircon (ZrSiO_4), sillimanite ($\text{Al}_2\text{O}_3 \cdot \text{SiO}_2$), sodium zirconium phosphate (NaZrPO_4), fused silica (SiO_2), cordierite ($4(\text{Mg,Fe})\text{O} \cdot 4\text{Al}_2\text{O}_3 \cdot 10\text{SiO}_2 \cdot \text{H}_2\text{O}$), and aluminum titanate (AlTiO_4). These materials are
25 readily available from commercial suppliers, such as CERAC (Milwaukee, WI) and Unitec Ceramic (Stafford, England). Mullite is preferred because it can readily be thermally sprayed to produce a range of porosities. Mullite coated material has a CTE of $3.8 \times 10^{-6}^\circ\text{C}^{-1}$ ($2.1 \times 10^{-6}^\circ\text{F}^{-1}$) to $4.7 \times 10^{-6}^\circ\text{C}^{-1}$ ($2.6 \times 10^{-6}^\circ\text{F}^{-1}$) from room temperature to 540°C (1000°F) and a thermal conductivity of $1.4 \text{ J sec}^{-1}\text{m}^{-1}^\circ\text{C}^{-1}$ ($9.6 \text{ Btu hr}^{-1}\text{ft}^{-2}(\text{F/in})^{-1}$) to $1.1 \text{ J sec}^{-1}\text{m}^{-1}^\circ\text{C}^{-1}$ (7.7
30 $\text{Btu hr}^{-1}\text{ft}^{-2}(\text{F/in})^{-1}$) from room temperature to 590°C . If the coating will be used in an application that does not involve rapid thermal cycling, a suitable ceramic material, such as one of the materials listed above, ZrO_2 , or another ceramic, can be used as the matrix.

- 5 -

The secondary phase can be any ceramic material that has thermal expansion, thermal conductivity, heat capacity, and mechanical properties different from those of the matrix. By controlling the composition, structure, particle size, and amount of the secondary phase in the matrix, the composite's thermal properties, especially its thermal conductivity and CTE, and porosity can be tailored to a particular application. The secondary phase creates controlled local zones in the coating that inhibit crack propagation by deflecting and blunting cracks. As a result, the secondary phase improves the coating's overall mechanical properties. Suitable secondary phase materials include silica powder, hollow silica spheres, calcined clay, cristobalite (fused quartz), sillimanite ($\text{Al}_2\text{O}_3 \cdot \text{SiO}_2$), or cordierite ($\text{Mg}_2\text{Al}_4\text{Si}_5\text{O}_{18}$). Such materials can be purchased from CERAC, Kieth Ceramic Materials, Ltd. (Belvedere, Kent, England), or CE Minerals (Andersonville, GA). If desired, the composite can have more than one secondary phase. For example, cristobalite and silica can be used together in a high porosity ceramic composite top layer. Preferably, the secondary phase will be added as a powder to powdered matrix material to produce an agglomerated and/or pre-reacted powder. Such powders can create coatings with repeatable properties and structures and a fine, homogeneous distribution of the secondary phase in the matrix. Alternately, the matrix and secondary phase can be mixed together in a calcined clay. The secondary phase should make up about 5 wt% to about 50 wt% of the ceramic composite top layer. The thickness and porosity of the ceramic composite top layer should be selected to provide a thermal conductivity and CTE that result in low in-plane thermal stresses. Low in-plane thermal stresses are important to make a durable coating. In some applications, for example, the ceramic composite top layer can have a porosity of about 10% to about 70% and be about 0.25 mm (10 mils) to about 1.5 mm (60 mils) thick.

All layers of the thermal barrier coating of the present invention can be deposited with conventional methods, such as the plasma spray methods described in commonly assigned U.S. Patents 4,481,237 to Bosshart et al. and 4,588,607 to Matarese et al., both of which are incorporated by reference. To achieve good results, the particles sprayed in each step should be agglomerated and/or prealloyed, or fused and crushed, of uniform composition, and be between about 10 μm and about 240 μm in diameter. For a coating with a porosity of about 40% to about 70%, the secondary phase powder particles should be between about 44 μm and about 240 μm in diameter. This particle size distribution can produce controlled levels of interconnected porosity without the use of a fugitive polymer. During deposition, the substrate should be at a temperature of about 200°C (400°F) to about 480°C (900°F). A

- 6 -

person skilled in the art will know the appropriate spray parameters. The plasma spray process parameters should be selected to provide particle temperatures high enough to achieve good particle to particle bonding but low enough to avoid fully melting and splatting the particles. Fully melted particles would produce a denser, less porous coating than that of the present invention.

The following examples demonstrate the present invention without limiting the invention's broad scope.

Example 1

A ceramic composite coating of the present invention was prepared by first depositing a 0.1 mm Metco® 443 (Metco division of Perkin Elmer Corp., Westbury, NY) Ni-Cr-Al bond coat and two 0.5 mm CoCrAlY/Al₂O₃ layers onto a steel substrate. The first CoCrAlY/Al₂O₃ layer had a constant composition of 60 wt% CoCrAlY and 40 wt% Al₂O₃. The second CoCrAlY/Al₂O₃ layer was graded and had a final composition of 20 wt% CoCrAlY and 80 wt% Al₂O₃. Next, a ceramic composite top layer was deposited on top of the second CoCrAlY/Al₂O₃ layer. The ceramic composite top layer was made from a thorough mixture of 80 wt% mullite powder (CERAC, Milwaukee, WI) and 20 wt% SiO₂ powder (CERAC). Both powders had particles that ranged from about 10 μm to about 150 μm in diameter. All four layers were deposited with a Metco external injector spray gun operated at 35 kW with nitrogen primary gas and hydrogen secondary gas. The substrate was held at about 260°C (500°F) during deposition. The powder delivery parameters included a feed rate of 72 g/min and a carrier flow of 5.2 standard l/min, standard set points for ceramic materials. After deposition, the top layer of the coating had a porosity of about 25%.

Example 2

A second ceramic composite coating of the present invention was prepared as in Example 1. The bond coat and two CoCrAlY/Al₂O₃ layers were identical to those in Example 1. The ceramic composite top layer was made from a thorough mixture of 70 wt% mullite powder (CERAC) and 30 wt% Mulcoa™ 70 calcined clay (CE Materials, Andersonville, GA). The mullite powder had particles between about 10 μm and about 150 μm in diameter. The Mulcoa™ 70 calcined clay had a composition of about 87 wt% mullite and about 13 wt% silica and particles between about 44 μm and about 240 μm in diameter. The spray parameters were identical to those in Example 1. After deposition, the top layer of the coating had a porosity of about 25%.

- 7 -

Example 3

A third ceramic composite coating of the present invention was prepared as in Example 1. The bond coat and two CoCrAlY/ Al_2O_3 layers were identical to those in Example 1. The ceramic composite top layer was made Mulcoa™ 70 calcined clay (CE Materials) that had a composition of about 87 wt% mullite and about 13 wt% silica. The calcined clay had particles that ranged from about 44 μm to about 240 μm in diameter. The spray parameters were identical to those in Example 1. After deposition, the top layer of the coating had a porosity of about 55%.

Example 4

A fourth ceramic composite coating of the present invention was prepared as in Example 1. The bond coat and two CoCrAlY/ Al_2O_3 layers were identical to those in Example 1. The ceramic composite top layer was made from Mulcoa™ 47 calcined clay (CE Materials) that had a composition of about 65 wt% mullite, about 15 wt% cristobalite, and about 20 wt% silica. The calcined clay had particles that ranged from about 44 μm to about 240 μm in diameter. The spray parameters were identical to those in Example 1. After deposition, the top layer of the coating had a porosity of about 55%. Fig. 2 is a photomicrograph of this coating.

Examples 3 and 4 show that thermal barrier coatings with a ceramic top layer porosity of greater than 40% can be made without using a fugitive polymer during the thermal spray process. As a result, the coatings of the present invention do not require a bake-out step to remove a fugitive material and produce large, interconnected pores.

The coatings from Examples 1-4 and two baseline coatings were subjected a series of thermal cycles to determine their durability. The first baseline coating had a 0.1 mm Ni-Cr-Al bond coat, a 0.5 mm constant composition CoCrAlY/ ZrO_2 layer with 60 wt% CoCrAlY and 40 wt% ZrO_2 , a 0.5 mm graded composition CoCrAlY/ ZrO_2 layer with a final composition of 20 wt% CoCrAlY and 80 wt% ZrO_2 , and a 0.5 mm ZrO_2 top layer. The second baseline coating had a 0.1 mm Ni-Cr-Al bond coat, a 0.5 mm constant composition CoCrAlY/mullite layer with 60 wt% CoCrAlY and 40 wt% mullite, a 0.5 mm graded composition CoCrAlY/mullite layer with a final composition of 20 wt% CoCrAlY and 80 wt% mullite, and a 0.5 mm mullite top layer. A cycle consisted of locally heating the coatings to 850°C with an oxy-acetylene torch while cooling the back sides of the samples to 650°C with air jets for 30 sec followed by 30 sec of cooling. The cycle was repeated until the samples showed significant cracking or delamination from the steel substrate. The first

- 8 -

baseline coating delaminated after about 1 hour of testing. The baseline coatings showed significant cracking and coating uplift after about 3 hours of testing. By contrast, the four coatings of the present invention showed little or no cracking after the same amount of time.

5 The tests described above show that the coatings of the present invention can provide longer service lives than coatings without ceramic composite top layers. The secondary phase in the ceramic composite top layer allows the thermal conductivity and thermal expansion properties of coating of the present invention to be tailored to a particular application. As a result, in-plane thermal stresses due to local hot spots can be decreased while achieving a desired thermal conductance. The secondary phase also improves the coating's fracture
10 toughness by deflecting and blunting cracks. As a result, internal combustion engines that incorporate a coating of the present invention can operate at more severe conditions and provide better performance and efficiency than prior art engines. The coating can be applied to piston crowns, piston head firedecks, and any other in-cylinder parts that require insulation.

15 The coatings of the present invention also can extend the service of life of parts used in other applications, whether they involve rapid thermal cycling or not. For example, coatings of the present invention can be used on injector nozzles in glass furnaces, coal gasifier nozzle injectors, high performance exhaust systems for gasoline engines, jet engine turbine blades, and other applications.

20 The invention is not limited to the particular embodiments shown and described herein. Various changes and modifications may be made without departing from the spirit or scope of the claimed invention.

We claim:

- 9 -

Claims

1. A metal article coated with a ceramic coating, wherein the coating comprises:
 - (a) a metallic bond coat deposited on the metal article,
 - (b) at least one MCrAlY/ceramic layer deposited on the bond coat, wherein M is Fe, Ni, Co, or a mixture of Ni and Co, and the ceramic in the
5 MCrAlY/ceramic layer comprises mullite, alumina, zircon, sillimanite, sodium zirconium phosphate, fused silica, cordierite, aluminum titanate, or zirconia, and
 - (c) a ceramic composite top layer deposited on the MCrAlY/ceramic layer,
10 wherein the ceramic composite top layer comprises a ceramic matrix and at least one secondary phase dispersed in the matrix such that the secondary phase inhibits crack propagation in the ceramic composite layer.
2. The article of claim 1, wherein the matrix of the ceramic composite top layer has a coefficient of thermal expansion less than about $5.4 \times 10^{-6}^{\circ}\text{C}^{-1}$ and a thermal conductivity between about $1 \text{ J sec}^{-1}\text{m}^{-1}^{\circ}\text{C}^{-1}$ and about $1.7 \text{ J sec}^{-1}\text{m}^{-1}^{\circ}\text{C}^{-1}$.
3. The article of claim 1, wherein the matrix of the ceramic composite top layer comprises a ceramic with a coefficient of thermal expansion less than about $4.9 \times 10^{-6}^{\circ}\text{C}^{-1}$ and a thermal conductivity between about $1.1 \text{ J sec}^{-1}\text{m}^{-1}^{\circ}\text{C}^{-1}$ and about $1.4 \text{ J sec}^{-1}\text{m}^{-1}^{\circ}\text{C}^{-1}$.
4. The article of claim 1, wherein the matrix comprises mullite, zircon, sillimanite, sodium zirconium phosphate, fused silica, cordierite, aluminum titanate, or zirconia.
5. The article of claim 1, wherein the secondary phase comprises silica, hollow silica spheres, calcined clay, cristobalite, sillimanite, or cordierite.
6. The article of claim 1, wherein the matrix comprises mullite and the secondary phase comprises silica powder, wherein the ceramic top layer has a porosity between about 10% and about 40%.

- 10 -

7. The article of claim 1, wherein the matrix comprises mullite and the secondary phase comprises calcined clay, wherein the ceramic top layer has a porosity between about 10% and about 40%.

8. The article of claim 1, wherein the ceramic matrix and secondary phase are formed from a calcined clay that comprises mullite and silica, wherein the ceramic top layer has a porosity between about 40% and about 70%.

9. The article of claim 1, wherein the ceramic matrix and secondary phase are formed from a calcined clay that comprises mullite, cristobalite, and silica, wherein the ceramic top layer has a porosity between about 40% and about 70%.

10. An internal combustion engine including a cylinder (2) with a top side and a bottom side; a piston (4) disposed in the cylinder (2) such that the piston (4) is free to move in the cylinder (2), wherein the piston (4) has a piston crown that faces the top side of the cylinder (2); and a piston head firedeck that closes the top side of the cylinder (2), wherein the piston crown and piston head firedeck together define a variable volume combustion chamber in the cylinder; wherein the improvement comprises a thermal barrier coating (6) on the piston crown comprising:

- (a) a metallic bond coat deposited on the piston crown,
- (b) at least one MCrAlY/ceramic layer deposited on the bond coat, wherein M is Fe, Ni, Co, or a mixture of Ni and Co, and the ceramic in the MCrAlY/ceramic layer comprises mullite, alumina, zircon, sillimanite, sodium zirconium phosphate, fused silica, cordierite, or aluminum titanate, and
- (c) a ceramic composite top layer deposited on the MCrAlY/ceramic layer, wherein the ceramic composite top layer comprises a ceramic with a coefficient of thermal expansion less than about $5.4 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$ and a thermal conductivity between about $1 \text{ J sec}^{-1}\text{m}^{-1}\text{ } ^\circ\text{C}^{-1}$ and about $1.7 \text{ J sec}^{-1}\text{m}^{-1}\text{ } ^\circ\text{C}^{-1}$ and at least one secondary phase dispersed in the matrix such that the secondary phase inhibits crack propagation in the ceramic composite top layer.

- 11 -

11. The internal combustion engine of claim 10, wherein the piston head firedeck is coated with the same coating as the piston crown.

12. The internal combustion engine of claim 10, wherein the matrix of the ceramic composite top layer comprises mullite, zircon, sillimanite, sodium zirconium phosphate, fused silica, cordierite, or aluminum titanate.

13. The internal combustion engine of claim 10 wherein the secondary phase in the ceramic composite top layer comprises silica, hollow silica spheres, calcined clay, cristobalite, sillimanite, or cordierite.

14. A method of coating a metal article with a ceramic coating, comprising:

- (a) depositing a metallic bond coat on the metal article,
- (b) depositing at least one MCrAlY/ceramic layer on the bond coat, wherein M is Fe, Ni, Co, or a mixture of Ni and Co, and the ceramic in the MCrAlY/ceramic layer comprises mullite, alumina, zircon, sillimanite, sodium zirconium phosphate, fused silica, cordierite, aluminum titanate, or zirconia, and
- (c) depositing a ceramic composite top layer on the MCrAlY/ceramic layer, wherein the ceramic composite top layer comprises a ceramic matrix and at least one secondary phase dispersed in the matrix such that the secondary phase inhibits crack propagation in the ceramic composite top layer.

15. The method of claim 14, wherein the matrix of the ceramic composite top layer comprises mullite, zircon, sillimanite, sodium zirconium phosphate, fused silica, cordierite, aluminum titanate, or zirconia.

16. The method of claim 14, wherein the secondary phase in the ceramic composite top layer comprises silica, hollow silica spheres, calcined clay, cristobalite, sillimanite, or cordierite.

17. The method of claim 14, wherein the ceramic composite top layer is made from a mullite powder and a silica powder, wherein substantially all particles in both powders are

- 12 -


between about 10 μm and about 150 μm in diameter and the ceramic composite top layer has a porosity between about 10% and about 40%.

18. The method of claim 14, wherein the ceramic composite top layer is made from a mullite powder and a calcined clay, wherein substantially all particles in the mullite powder are between about 10 μm and about 150 μm in diameter, substantially all particles in the calcined clay are between about 44 μm and about 240 μm in diameter, and the ceramic
5 composite top layer has a porosity between about 10% and about 40%.

19. The method of claim 14, wherein the ceramic composite top layer is made from a calcined clay that comprises mullite and silica, wherein substantially all particles in the calcined clay are between about 44 μm and about 240 μm in diameter and the ceramic top layer has a porosity between about 40% and about 70%.

20. The method of claim 14, wherein the ceramic composite top layer is made from a calcined clay that comprises mullite, cristobalite, and silica, wherein substantially all particles in the calcined clay are between about 44 μm and about 240 μm in diameter and the ceramic composite top layer has a porosity between about 40% and about 70%.

fig. 1

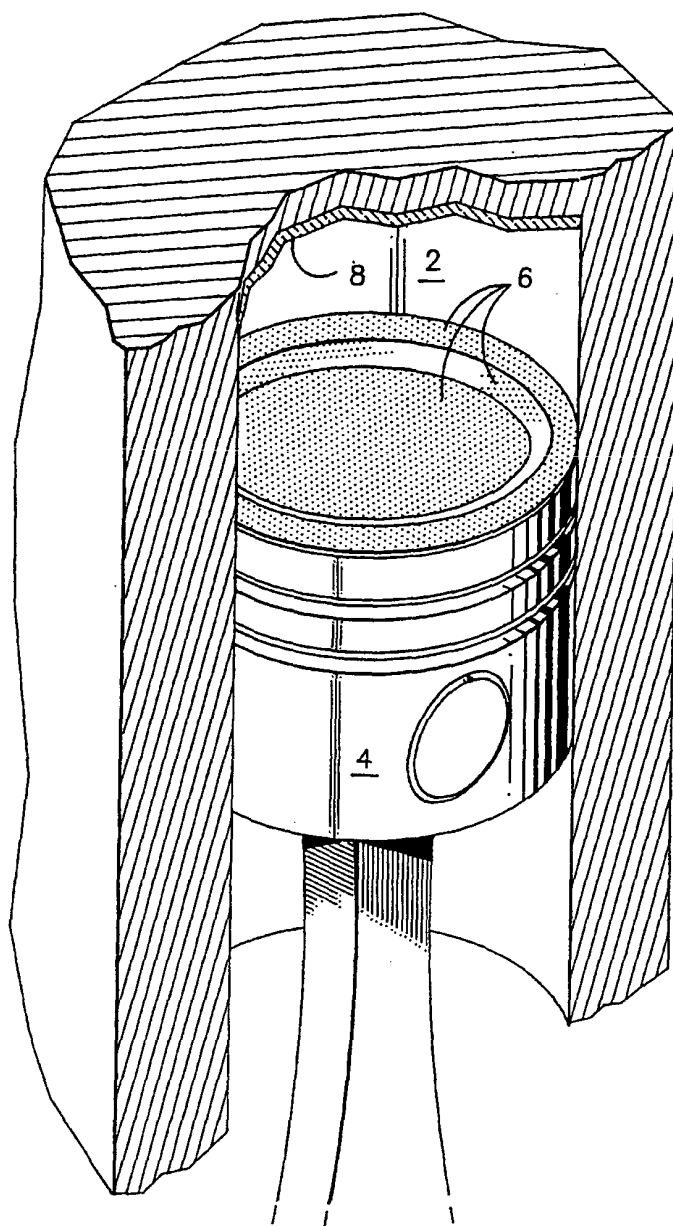

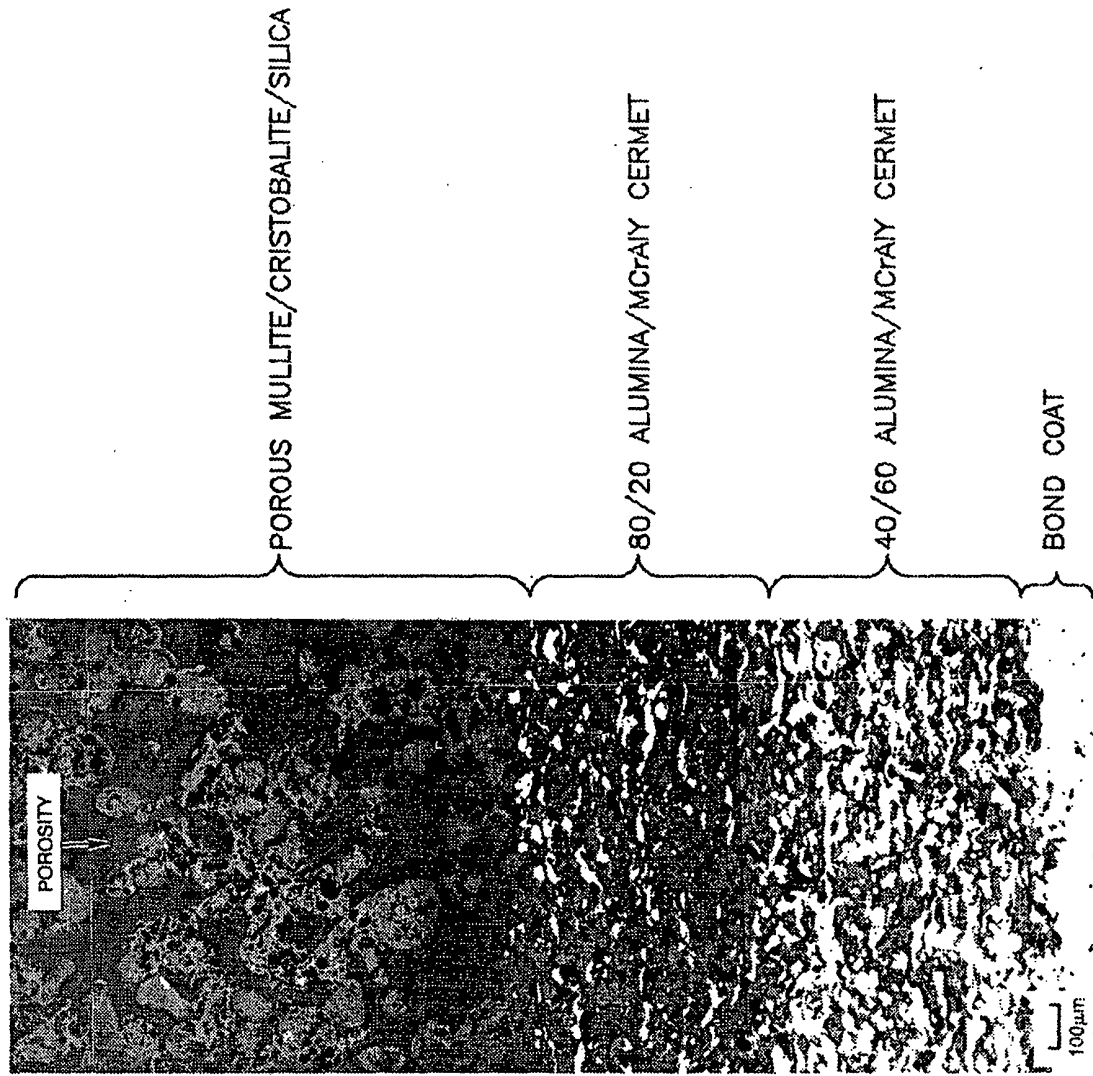


fig.2

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 93/09038

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ⁴ According to International Patent Classification (IPC) or to both National Classification and IPC IPC ⁵ : C 23 C 28/00																	
II. FIELDS SEARCHED <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black; margin: 5px 0;">Minimum Documentation Searched ⁷</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; border-bottom: 1px solid black; padding: 5px;">Classification System</td> <td style="width: 50%; border-bottom: 1px solid black; padding: 5px;">Classification Symbols</td> </tr> <tr> <td style="padding: 5px;">IPC⁵</td> <td style="padding: 5px;">C 23 C</td> </tr> </table> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black; margin: 5px 0;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸</div>			Classification System	Classification Symbols	IPC ⁵	C 23 C											
Classification System	Classification Symbols																
IPC ⁵	C 23 C																
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹ <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%; padding: 5px;">Category ⁹</th> <th style="width: 70%; padding: 5px;">Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²</th> <th style="width: 20%; padding: 5px;">Relevant to Claim No. ¹³</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">EP, A2, 0 340 791 (HITACHI, LTD.) 08 November 1989 (08.11.89), abstract; fig. 3; claims 1-11.</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1-20</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">US, A, 4 916 022 (PATRICIA A. SOLFEST, et al.) 10 April 1990 (10.04.90), abstract; fig. 1; claims 1-7.</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1-20</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">US, A, 4 880 614 (THOMAS E. STRANGMAN et al.) 14 November 1989 (14.11.89), abstract; fig. 1; claims 1-9.</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1-20</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">US, A, 4 335 190 (ROBERT C. BILL et al.) 15 June 1982 (15.06.82), abstract; claims 1-10.</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1-20</td> </tr> </tbody> </table>			Category ⁹	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³	A	EP, A2, 0 340 791 (HITACHI, LTD.) 08 November 1989 (08.11.89), abstract; fig. 3; claims 1-11.	1-20	A	US, A, 4 916 022 (PATRICIA A. SOLFEST, et al.) 10 April 1990 (10.04.90), abstract; fig. 1; claims 1-7.	1-20	A	US, A, 4 880 614 (THOMAS E. STRANGMAN et al.) 14 November 1989 (14.11.89), abstract; fig. 1; claims 1-9.	1-20	A	US, A, 4 335 190 (ROBERT C. BILL et al.) 15 June 1982 (15.06.82), abstract; claims 1-10.	1-20
Category ⁹	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³															
A	EP, A2, 0 340 791 (HITACHI, LTD.) 08 November 1989 (08.11.89), abstract; fig. 3; claims 1-11.	1-20															
A	US, A, 4 916 022 (PATRICIA A. SOLFEST, et al.) 10 April 1990 (10.04.90), abstract; fig. 1; claims 1-7.	1-20															
A	US, A, 4 880 614 (THOMAS E. STRANGMAN et al.) 14 November 1989 (14.11.89), abstract; fig. 1; claims 1-9.	1-20															
A	US, A, 4 335 190 (ROBERT C. BILL et al.) 15 June 1982 (15.06.82), abstract; claims 1-10.	1-20															
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>¹⁰ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"Z" document member of the same patent family</p> </div> </div>																	
IV. CERTIFICATION <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; padding: 5px;"> Date of the Actual Completion of the International Search <div style="text-align: center;">03 December 1993</div> </td> <td style="width: 50%; padding: 5px;"> Date of Mailing of this International Search Report <div style="text-align: center;">04.01.94⁷</div> </td> </tr> <tr> <td style="width: 50%; padding: 5px;"> International Searching Authority <div style="text-align: center;">EUROPEAN PATENT OFFICE</div> </td> <td style="width: 50%; padding: 5px;"> Signature of Authorized Officer <div style="text-align: center;">HAUK e.h.</div> </td> </tr> </table>			Date of the Actual Completion of the International Search <div style="text-align: center;">03 December 1993</div>	Date of Mailing of this International Search Report <div style="text-align: center;">04.01.94⁷</div>	International Searching Authority <div style="text-align: center;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer <div style="text-align: center;">HAUK e.h.</div>											
Date of the Actual Completion of the International Search <div style="text-align: center;">03 December 1993</div>	Date of Mailing of this International Search Report <div style="text-align: center;">04.01.94⁷</div>																
International Searching Authority <div style="text-align: center;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer <div style="text-align: center;">HAUK e.h.</div>																

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, " with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	<p style="text-align: center;">--</p> US, A, 4 055 705 (STEPHAN STECURA et al.) 25 October 1977 (25.10.77), abstract; claims 1-8. <p style="text-align: center;">----</p>	1-20

ANHANG

zum internationalen Recherchen-
bericht über die internationale
Patentanmeldung Nr.

ANNEX

to the International Search
Report to the International Patent
Application No.

ANNEXE

au rapport de recherche inter-
national relatif à la demande de brevet
international n°

PCT/US 93/09038 SAE 79956

- In diesen Anhang sind die Mitglieder
der Patentfamilien der in obenge-
nannten internationalen Recherchenbericht
angeführten Patentedokumente angegeben.
- Diese Angaben dienen nur zur Unter-
richtung und erfolgen ohne Gewähr.

This Annex lists the patent family
members relating to the patent documents
cited in the above-mentioned inter-
national search report. The Office is
in no way liable for these particulars
which are given merely for the purpose
of information.

La présente annexe indique les
membres de la famille de brevets
relatifs aux documents de brevets cités
dans le rapport de recherche inter-
national visée ci-dessus. Les renseigne-
ments fournis sont donnés à titre indica-
tif et n'engagent pas la responsabilité
de l'Office.

Im Recherchenbericht angeführtes Patentedokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
EP A2 340791	08-11-89	EP A3 340791 JP A2 1279781 US A 4966820 US A 5209645 JP A2 3020451	31-01-90 10-11-89 30-10-90 11-05-93 29-01-91
US A 4916022	10-04-90	keine - none - rien	
US A 4880614	14-11-89	EP A2 366924 EP A3 366924 US A 5015502	09-05-90 23-05-90 14-05-91
US A 4335190	15-06-82	keine - none - rien	
US A 4055705	25-10-77	keine - none - rien	